

### Modified compressor housing and charge pressure hose

#### Introduction:


The vehicle manufacturer has made a technical change to the compressor housing, which necessitates the use of a modified charge pressure hose. Here, the cross-section dimension of the hose has changed.

#### Note:

If a turbocharger 5303 988 0053 without an integrated silencer has previously been installed, the following components are to be procured at OE for the installation of the new turbocharger.

#### Instructions:

When installing the turbocharger, ensure that the prop is correctly installed between the turbocharger and the engine block. Otherwise, the flange connection to the exhaust manifold can be released.

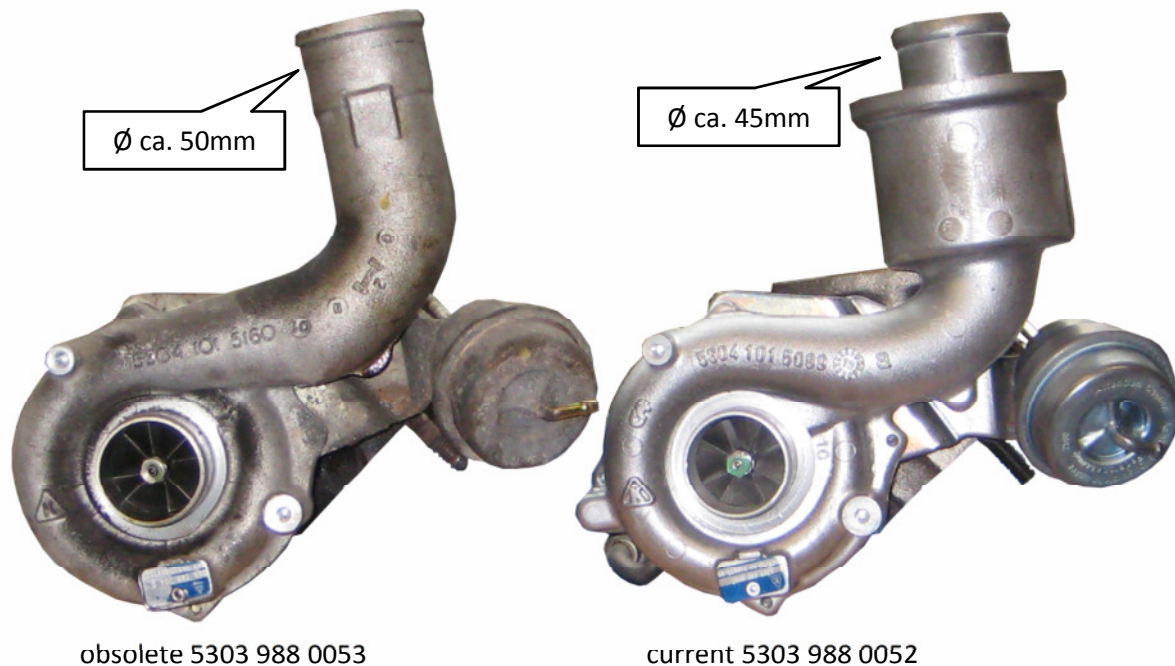

**Vehicle Manufacturer:** AUDI, VW, SEAT

**Vehicle:** A3 (8L1), TT (8N3, 8N9), GOLF V (1J1), BORA (1J6), BEETLE (9C1, 1C1), IBIZA IV (6L1), POLO (9N\_)

**Engine code:** 1.8 T, AUM, AUQ, ARY, ARX, AWV, AVC, APH, BBU, BLZ, BKV

**Validity:** This service information is valid for renewing the turbocharger with

**BTS reference:** T912181      **BTS-Service-Set-Nr:** T981214, T981215, T981216

**Manufacturer part no.:** 53039700052, 53039700053, 53039700058, 53039700094, 53039880052, 53039880053, 53039880058, 53039880094

Please note: OE-references are only for means of comparison. The content of this Service Information is non-binding and is only for informational purposes. The manufacturer specifications have to be adhered to.