



# High pressure pump PTA441-0001

## TECHNICAL INFORMATION ON INSTALLATION

### ATTENTION!

A run-in or worn roller tappet (OE no.: 06L 109 311) of the high-pressure pump can cause, among other things

1. noises,
2. uneven engine running and
3. error messages [e.g. P0087; P2293]


although the high-pressure pump is fully functional.

PartsTec specifies the replacement of the roller tappet, PTA120-0043, when replacing the high-pressure pump.

The roller tappet must always be checked for wear during the repair. There is no additional work.

**When working on the fuel system, the respective specific repair instructions and cleanliness rules of the vehicle manufacturer must be observed.**

PartsTec also offers the repair kit, high-pressure pump PTA441-3000.

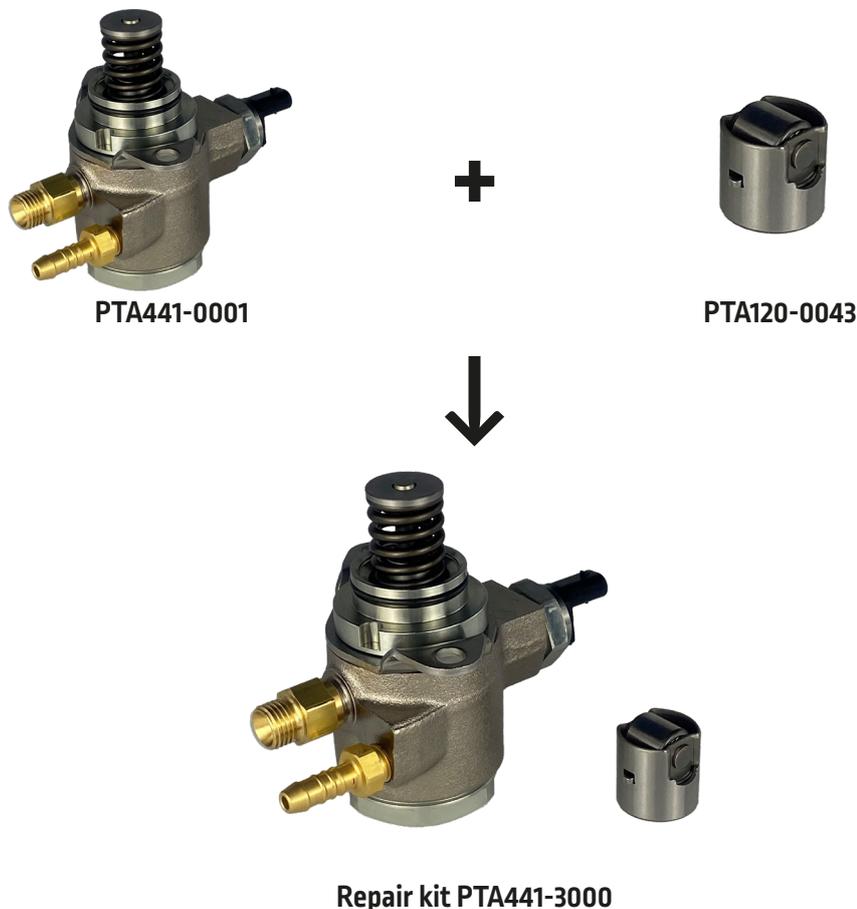

In the event of a warranty claim, a proof of the renewed roller tappet and a fault memory log must be enclosed.