



SERVICEINFORMATION

ADAPTER CABLE 4.07360.53.0

FOR REPLACING PREDECESSOR VERSIONS WITH THE LATEST EXHAUST BACK PRESSURE SENSORS






Adapter cable with accessories (item no. 4.07360.53.0)

The exhaust back pressure sensor with ref. no. 22 36 517 19R has been discontinued. This sensor was used in Renault engines. In some cases, the affected engines were also installed in Mercedes-Benz, Nissan and Dacia vehicles (see table on the back). As OE, the exhaust back pressure sensor has been replaced with a sensor that has a different connector plug. As a result, if this old, discontinued sensor fails, the original plug must be removed and replaced with a suitable one.

Exhaust back pressure sensor (item no. 7.12061.00.0)



To make it easier to replace the part, Motorservice offers the adapter cable 4.07360.53.0, which enables the discontinued exhaust back pressure sensor to be easily replaced with the suitable model 7.12061.00.0 from Pierburg.

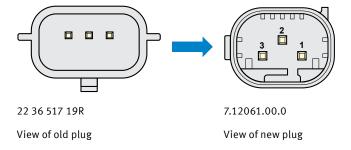

 $All \, content \, including \, pictures \, and \, diagrams \, is \, subject \, to \, change. \, For \, assignment \, and \, replacement, \, refer to \, the \, current \, catalogues \, or \, systems \, based \, on \, TecAlliance.$





PARTS ASSIGNMENT

| Exhaust back pressure sensor 7.12061.00.0 | | | |
|---|------------------------|-----------------|--|
| Pierburg no. | Manufacturer (excerpt) | Ref. no. | |
| 7.12061.00.0 | Renault, Dacia | 22 36 517 19R | |
| | Mercedes-Benz | A 607 905 02 00 | |
| | Nissan | 22760-00Q0A | |

| Adapter cable 4.07360.53.0 | | | |
|----------------------------|------------------------|-----------------|--|
| Pierburg no. | Manufacturer (excerpt) | Ref. no. | |
| 4.07360.53.0 | Renault, Dacia | 82 01 428 503 | |
| | Mercedes-Benz | A 415 540 16 01 | |
| | Nissan | 24021-00QAA | |


SCOPE OF SUPPLY FOR ADAPTER CABLE 4.07360.53.0

The set for the adapter cable 4.07360.53.0 contains:

- Cable with new plug (suitable for 7.12061.00.0)
- 3 shrink-fit connectors


CONVERSION MEASURE

- Cut off the old sensor 223651719R close to the old plug.
- Connect the adapter cable 4.07360.53.0 using the shrink-fit connectors, making sure to observe the pin assignment.

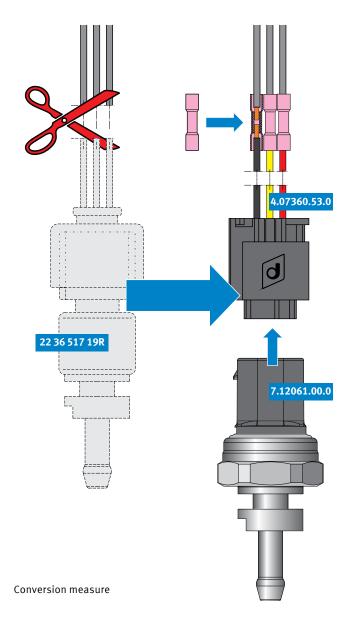

PIN ASSIGNMENT FOR EXHAUST BACK PRESSURE SENSOR 7.12061.00.0 AND ADAPTER CABLE 4.07360.53.0

- 01 Ground (red)
- 02 Signal output (yellow)
- 03 Supply voltage (black)



View of plug of adapter cable 4.07360.53.0

