




NORMACONNECT® V QRC





Unique quick release closure for rapid assembly


- ✓ Threaded trunnions enable installation with one hand
- ✓ Lightweight connection compared to bolted joint
- ✓ Adaptable to flanges which are slightly out of tolerance

 Air Intake & Induction

 Exhaust Systems


 Cooling Systems

 Fuel & Oil Systems

 Turbocharger Installations

 Fixing & Retaining

NORMACONNECT® V QRC

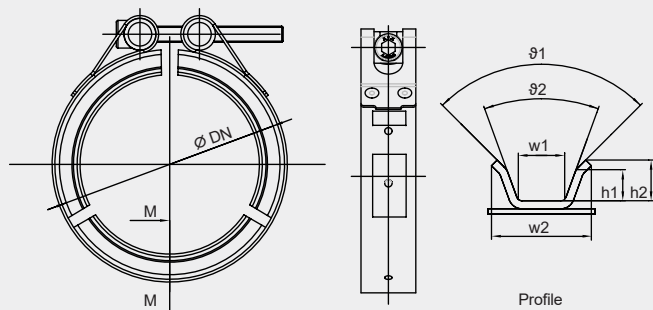

Applications

The V QRC Clamps are used in different segments of exhaust systems as well as turbocharger installations and offer excellent corrosion resistance properties.

Material

Group:	W3	W4	W5
Band & profile:	1.4510	1.4301	1.4571
Screw:	A2-70/A4-80		
Trunnions:	1.4305		

Part number	Description	Ø DN (mm)	Packaging quantity (pcs)	Profile dimensions					
				w1 (mm)	w2 (mm)	h1 (mm)	h2 (mm)	ϑ1	ϑ2
NORMACONNECT® V QRC									
06330580077	V-QRC 077 096	77	100	6.6	-	4.7	-	40°	-
06330578077	V-QRC 077 869	77	100	8.2	17.0	4.0	-	40°	-
06330579080	V-QRC 080 897	80	50	4.5	13.6	5.8	7.5	40°	70°
06330577080	V-QRC 080 2-0121	80	50	8.7	-	5.8	7.6	40°	90°
06332633082	V-QRC 082 0885	82	50	4.3	13.6	4	7.0	40°	-
06330576085	V-QRC 085 908	85	50	9.0	-	7.0	-	40°	-
06330575097	V-QRC 097 099	97	50	7.9	-	5.2	-	40°	-
06333633098	V-QRC 098 917	98	50	8.8	-	5.4	7.5	40°	90°
06330574103	V-QRC 103 097	103	50	6.5	-	3.6	5.05	40°	90°
06332633108	V-QRC 108 0884	108	50	13.6	-	4.0	7.0	40°	-
06334633112	V-QRC 112 015/P	112	30	6.5	-	7.8	-	40°	-
06332633115	V-QRC 115 933	115	50	7.9	-	5.4	7.8	40°	90°
06330571124	V-QRC 124 094	124	50	6.5	-	4.6	-	40°	-
06334633131	V-QRC 131 110/N4	131	50	6.5	20.0	7.2	-	40°	-
06334633135	V-QRC 135 015/P	135	50	6.5	-	7.8	-	40°	-
06331633143	V-QRC 143 101.D4	143	30	7.9	-	5.8	7.5	40°	90°
06334633145	V-QRC 145 015/P	145	50	6.5	-	7.8	-	40°	-
06334633146	V-QRC 155 110/N4	146	25	6.5	20.0	7.2	-	40°	-
06330572152	V-QRC 152 009	152	35	9.2	-	6.8	-	40°	-
06331633152	V-QRC 152 124/B5	152	30	7.9	-	5.8	7.0	40°	90°
06334633155	V-QRC 155 015/P	155	25	6.5	-	7.8	-	40°	-
06332633179	V-QRC 179 101 D4	179	50	7.9	-	5.3	7.5	40°	90°
06331633185	V-QRC 185 124/B5	185	30	7.9	-	5.8	7.5	40°	90°
06324632317	V-QRC 317	317	30	7.9	-	5.8	7.5	40°	90°
NORMACONNECT® V STC (with solid trunnion closure)									
06322632219	V-STC 219 101	219	30	7.9	-	5.8	7.5	40°	90°
06324632404	V-STC 404 P 015	404	40	6.5	-	7.8	-	40°	-



Do you have questions or require a personal consultation?
 Feel free to contact our Automotive Aftermarket Team! Hotline +44 1635 574 005
 Visit our website for more information about our Automotive Aftermarket products: norma-aftermarket.com