


10206400

R010624

MITSUBISHI

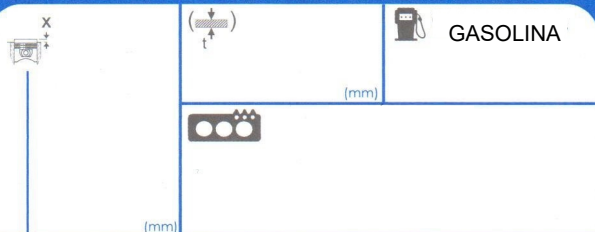

c.c. 1999 (cm3) 78.4 (mm)

1 6A12

1 81049400 M10X1.25X95(8)

- 1
- | | |
|------------|----------|
| 1) 3 Kpm | 5) 2 Kpm |
| 2) 5 Kpm | 6) 90° |
| 3) 7.5 Kpm | 7) 90° |
| 4) -180° | |

- 1
- | | |
|------------|------------|
| 1) 22 lbft | 5) 15 lbft |
| 2) 36 lbft | 6) 90° |
| 3) 54 lbft | 7) 90° |
| 4) -180° | |



1 NO

RETIGHTENING

1 NO

RETIGHTENING

ROUGHNESS

	MLS	
ALUMINIUM ALUMINIO	0.5 / 1.0 µm	2.3 µm MAX
CAST IRON FUNDICIÓN	1.5 / 1.8 µm	3.8 µm MAX

19	11	10	14
16	12	9	13
8	4	1	5
7	3	2	6

TORQUE SEQUENCE

-90° +
-180°

<>

AJUSA IS NOT RESPONSIBLE FOR ANY UPGRADE AFTER THIS DOCUMENT HAD BEEN PRINTED. FOR MORE INFO, PLEASE SCAN THIS QR CODE OR VISIT OUR WEBSITE www.ajusa.es

AJUSA NO SE RESPONSABILIZA DE CUALQUIER ACTUALIZACIÓN POSTERIOR A LA IMPRESIÓN DE ESTE DOCUMENTO. PARA MAYOR INFORMACIÓN CAPTURE CON SU SMARTPHONE EL SIGUIENTE CÓDIGO QR O VISITE NUESTRA PÁGINA WEB www.ajusa.es

