



CLUTCHTECH



TSB-GM07

CLUTCH FITTING INSTRUCTIONS

Applies to ClutchPro kits: KGM20002, KGM22004


Clutch replacement on these vehicles can be carried out without the removal of either engine or gearbox. It is necessary however that the cover assembly is held in a compressed condition.

This is usually achieved by the use of three "U" shaped clips. These clips (Camira Compression Tool) have a slot in one side to fit around the rivet head on the cover assembly pressure plate.

On some early cover assemblies for 1.6 engines it has been found that the width of the slot is insufficient to fit around the rivet head. Where this is the case the slots in the slips should be opened up accordingly.

In fitting the clips, care must be taken not to damage the cover assembly drive straps. The clips should never be forced over the top of the rivet head.

The vehicle manufacturers fitting instructions must be followed carefully.

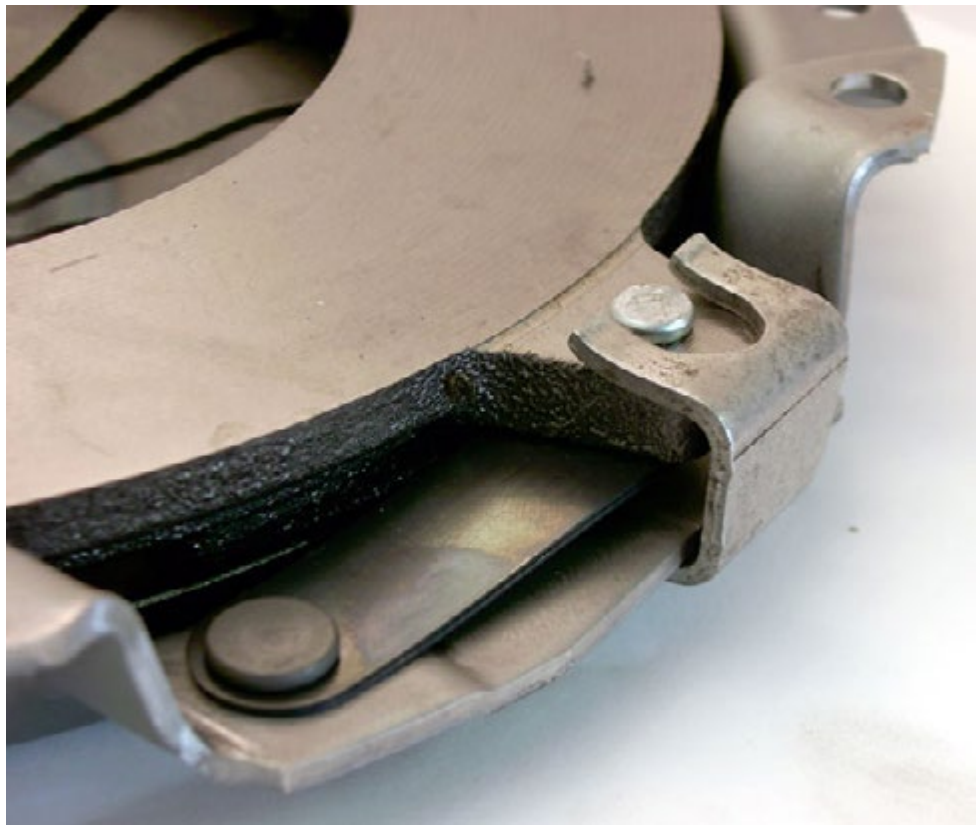

LEADING BRANDS

CLUTCHPRO CLUTCHPRO



australianclutch.com.au

1800 CLUTCH (258824)