

## Product info sheet


Robert Bosch

0445010028

Special tools needed?

Yes

With this tool it's possible to keep the toothbelt mounted. This is not necessarily.

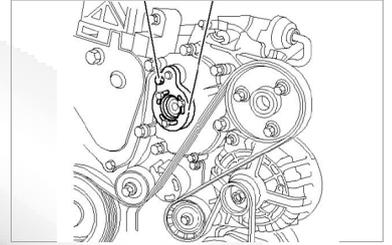

## Product specific information

Programming

No

Fix gearwheel when crankshaft is blocked.

Unlocking

No

Adaption values reset

No



Bleed

Yes

Ignition for 30 s, bleedscrew open.

adjustment at mounting\_1

No



adjustment at mounting\_2

## Tightening torques

Mounting fuelpump flange

32 Nm

Pump pulley/sprocket

50 Nm

High Pressure pipe nuts

27 Nm

## Assembly instructions

Recommendation: replace fuel filter

Recommendation: replace sealing ring

### Core charge terms:

- externally intact,
- no mechanical damage,
- not dismantled,
- no heavy corrosion.