

# ACDelco

## SELECT FLEET HD DIESEL 15W-40 ENGINE OIL



### ENGINEERED FOR PERFORMANCE

#### PRODUCT DESCRIPTION

ACDelco Select Fleet HD DIESEL 15W-40 is an extra high-performance diesel engine oil that provides excellent lubrication of today's diesel engines promoting extended engine life.

Formulated from high performance base oils and a superior balanced additive system to provide optimum engine performance, this extra high-performance engine oil has been proven in the field in a wide variety of industries, applications and mixed fleets.

#### FEATURES & BENEFITS

High output, low emission diesel engines significantly increase the demands on engine lubricants. Tighter engine designs reduce oil consumption, resulting in less fresh oil make-up to replenish depleted additives. Top piston fire rings are located higher on the piston bringing the oil film closer to the combustion chamber where higher temperatures increase thermal stress on the lubricant. Increased fuel injector pressure and retarded timing improve fuel burn efficiency, but also increase engine temperatures and increase soot loads.

- High thermal and oxidation stability from reduced sludge build-up, deposits and viscosity increase
- TBN reserves for deposit control and acid neutralisation
- Stay-in-grade shear stability provides wear protection and viscosity control
- Advanced detergency provides cleaner engines and longer component life
- Improved soot handling and viscosity control and used oil pumpability
- Excellent low temperature properties for start-up wear protection
- Component compatibility for longer gasket and seal life
- Meets demanding specifications of key OEMs with one engine oil for mixed fleet operations


#### PRODUCT DESCRIPTION

ACDelco Select Fleet HD DIESEL 15W-40 provides outstanding performance in both modern, demanding low-emission diesel engines and older diesel engines operating on low or high sulphur fuel.

#### Recommended by ACDelco for use in applications requiring:

- Naturally aspirated and turbo-charged diesel-powered engines from many leading Japanese, European, and American manufacturers
- On-highway light and heavy-duty trucking
- Off-highway industries including construction, mining, quarrying, and agriculture
- Mixed fleet applications

Look out for the application symbols across the ACDelco engine oil range. These will help you quickly find the spec you need.

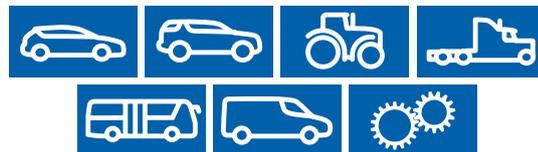

For your nearest ACDelco Automotive Parts Stockist  
call **1800 ACDelco** or visit **acdelco.com.au**


**ACDelco**

# ACDelco

## SELECT FLEET HD DIESEL 15W-40 ENGINE OIL



### ENGINEERED FOR PERFORMANCE

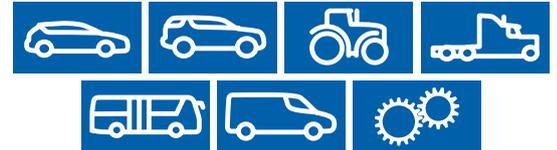

#### PROPERTIES AND SPECIFICATIONS

##### Meets or exceeds the requirements of:

- API CI-4, CH-4, CG-4, CF-4, CF / SL, SJ; ACEA E7, A2, B2; JASO DH-1

##### Recommended for use in applications requiring:

- CATERPILLARECF-2
- Cummins CES 20071 / 2 / 6 / 7 / 8
- Detroit7SE 270 (4-STROKE CYCLE)
- Mack EO-M / M Plus / N
- MB-Approval 228.3
- MTU Oil Category 2
- RENAULT TRUCKSRLD / TRUCKSRLD-2
- VOLVOVDS-2 / 3

ACDelco P/N	Size (L)
19375082	5
19375083	20
19375084	208

##### Properties

- Grade SAE 15W-40
- Ash, Sulfated, mass%, ASTM D874 1.3
- Density @ 15.6 C, g/ml, ASTM D4052 0.885
- Flash Point, °C, ASTM D92 228
- Kinematic Viscosity @ 100 C, mm<sup>2</sup>/s, ASTM D445 14.4
- Kinematic Viscosity @ 40 C, mm<sup>2</sup>/s, ASTM D445 106
- Pour Point, °C, ASTM D97 -33
- Total Base Number, mgKOH/g, ASTM D2896 12
- Viscosity Index, ASTM D2270 140 Property

#### HEALTH & SAFETY

Based on available information, this product is not expected to produce adverse effects on health when used for the intended application and the recommendations provided in the Material Safety Data Sheet (SDS) are followed.

Material Safety Data Sheets (MSDS) are available for download at [www.acdelco.com.au](http://www.acdelco.com.au)

This product should not be used for purposes other than its intended use.

If disposing of used product, take care to protect the environment.



For your nearest ACDelco Automotive Parts Stockist  
call **1800 ACDelco** or visit [acdelco.com.au](http://acdelco.com.au)

# ACDelco