

ASSEMBLY INSTRUCTIONS FOR OIL CHANGE KITS FOR AUTOMATIC TRANSMISSION

**/ MEYLE no. 300 135 0001 | 300 135 0002 | 300 135 1005
300 135 1006 | 100 135 0001 | 100 135 0002 | 100 135 0004**


**/ Short no. MOK0019 | MOK0020 | MOK0035 | MOK0037
MOK0007 | MOK0008 | MOK0051**


Gear type

***5HP19 | 5HP19 FL | 5HP19 FLA | 5HP24 | 5HP24 A
5HP30 | 6HP26 | 6HP26 X | 6HP32 | 6HP26 A61***



**Installation by qualified personnel only.
Car manufacturer's instructions to be
observed closely.**

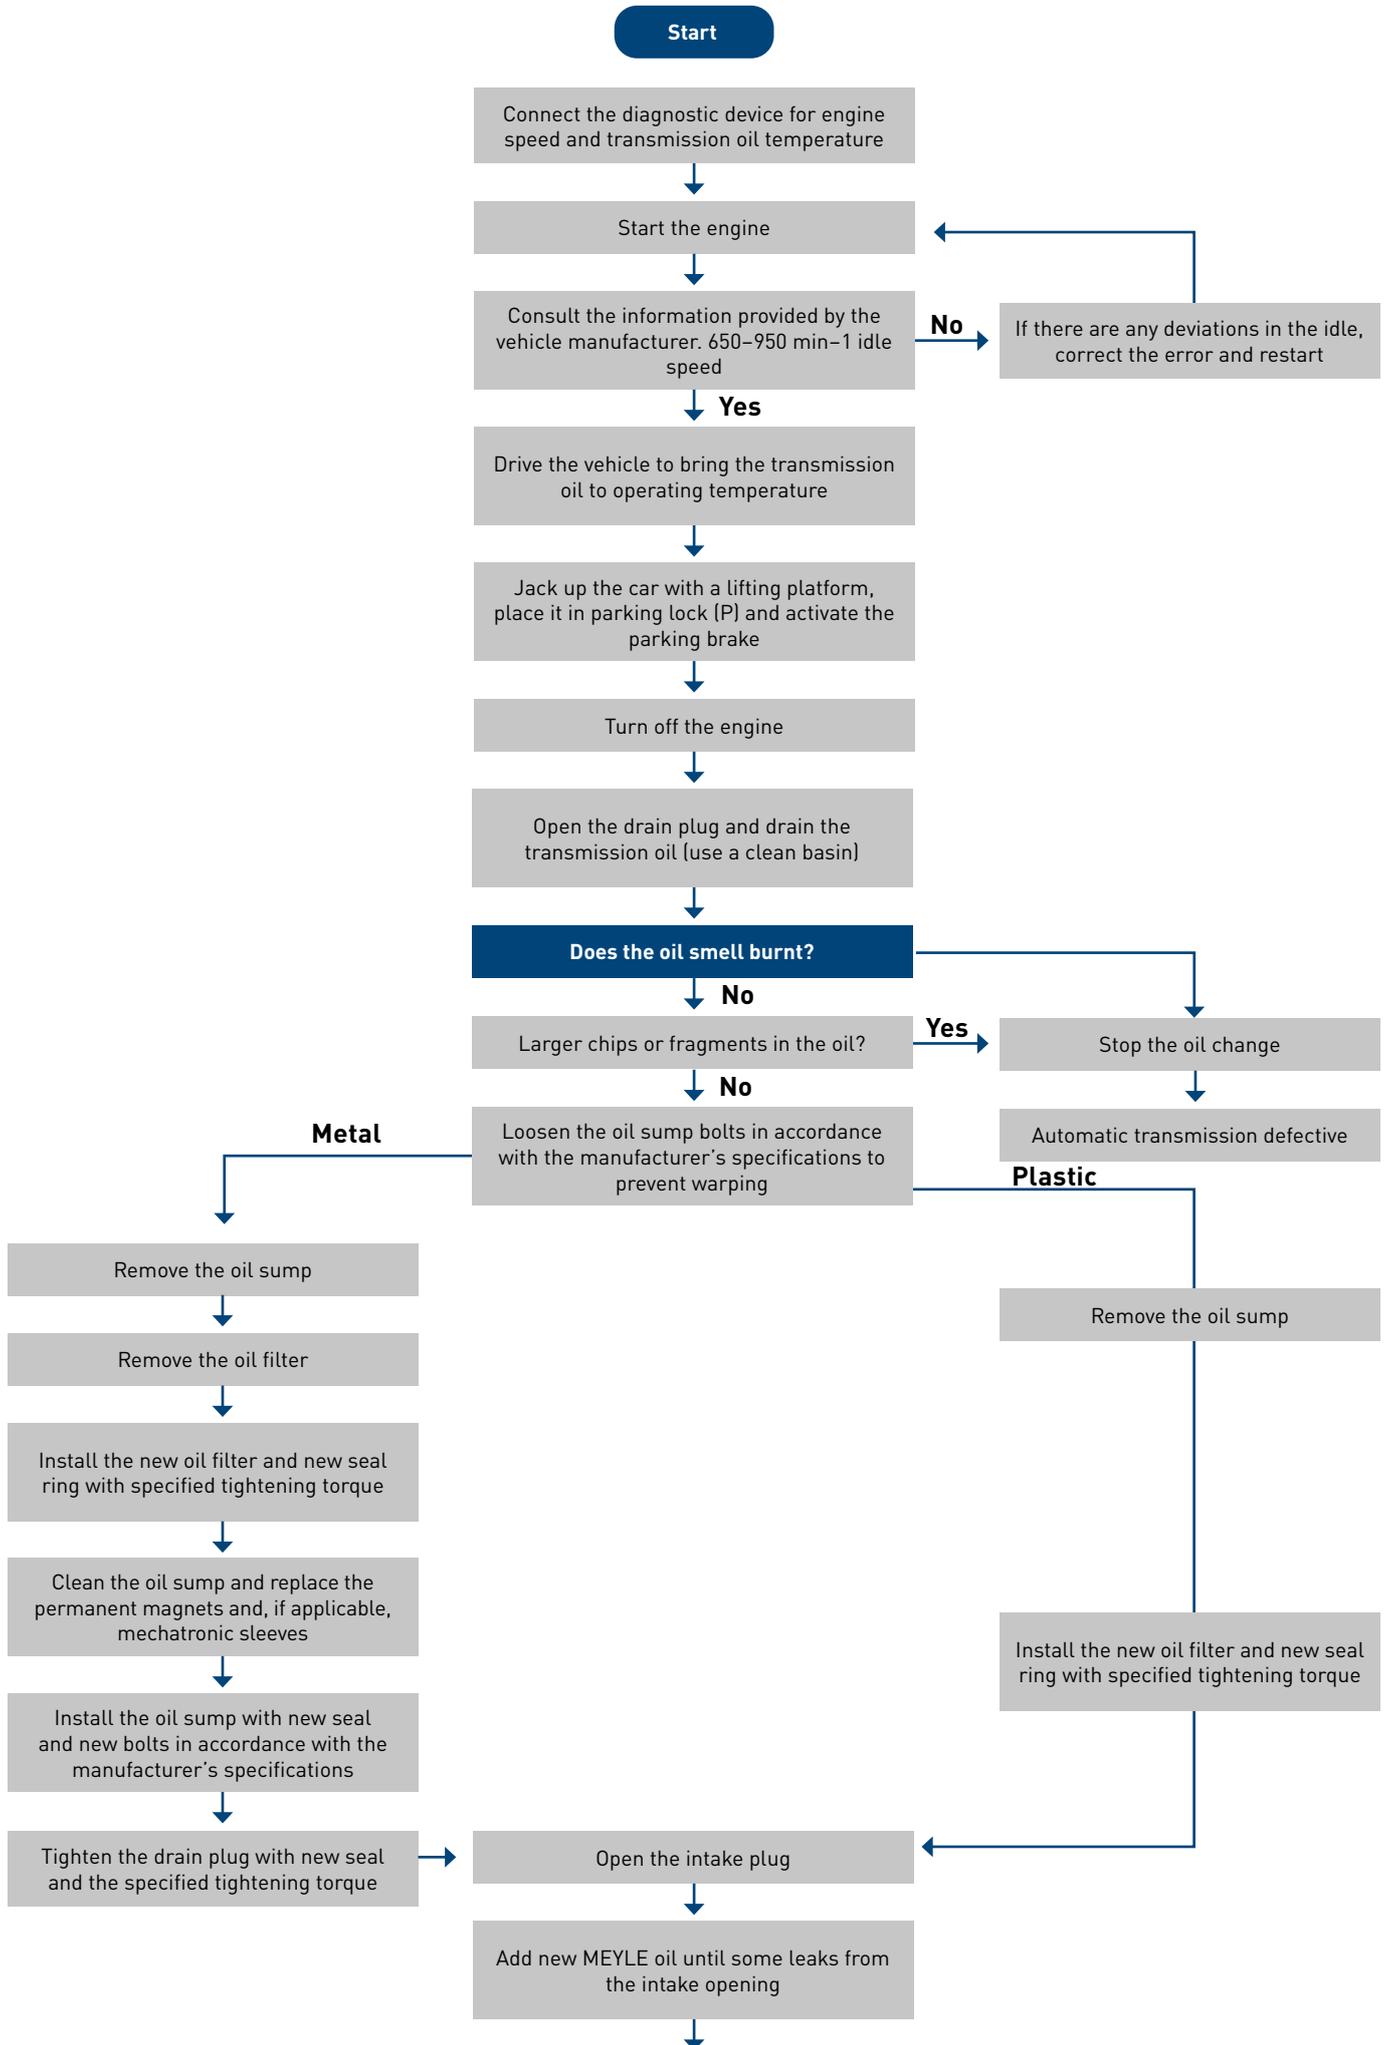

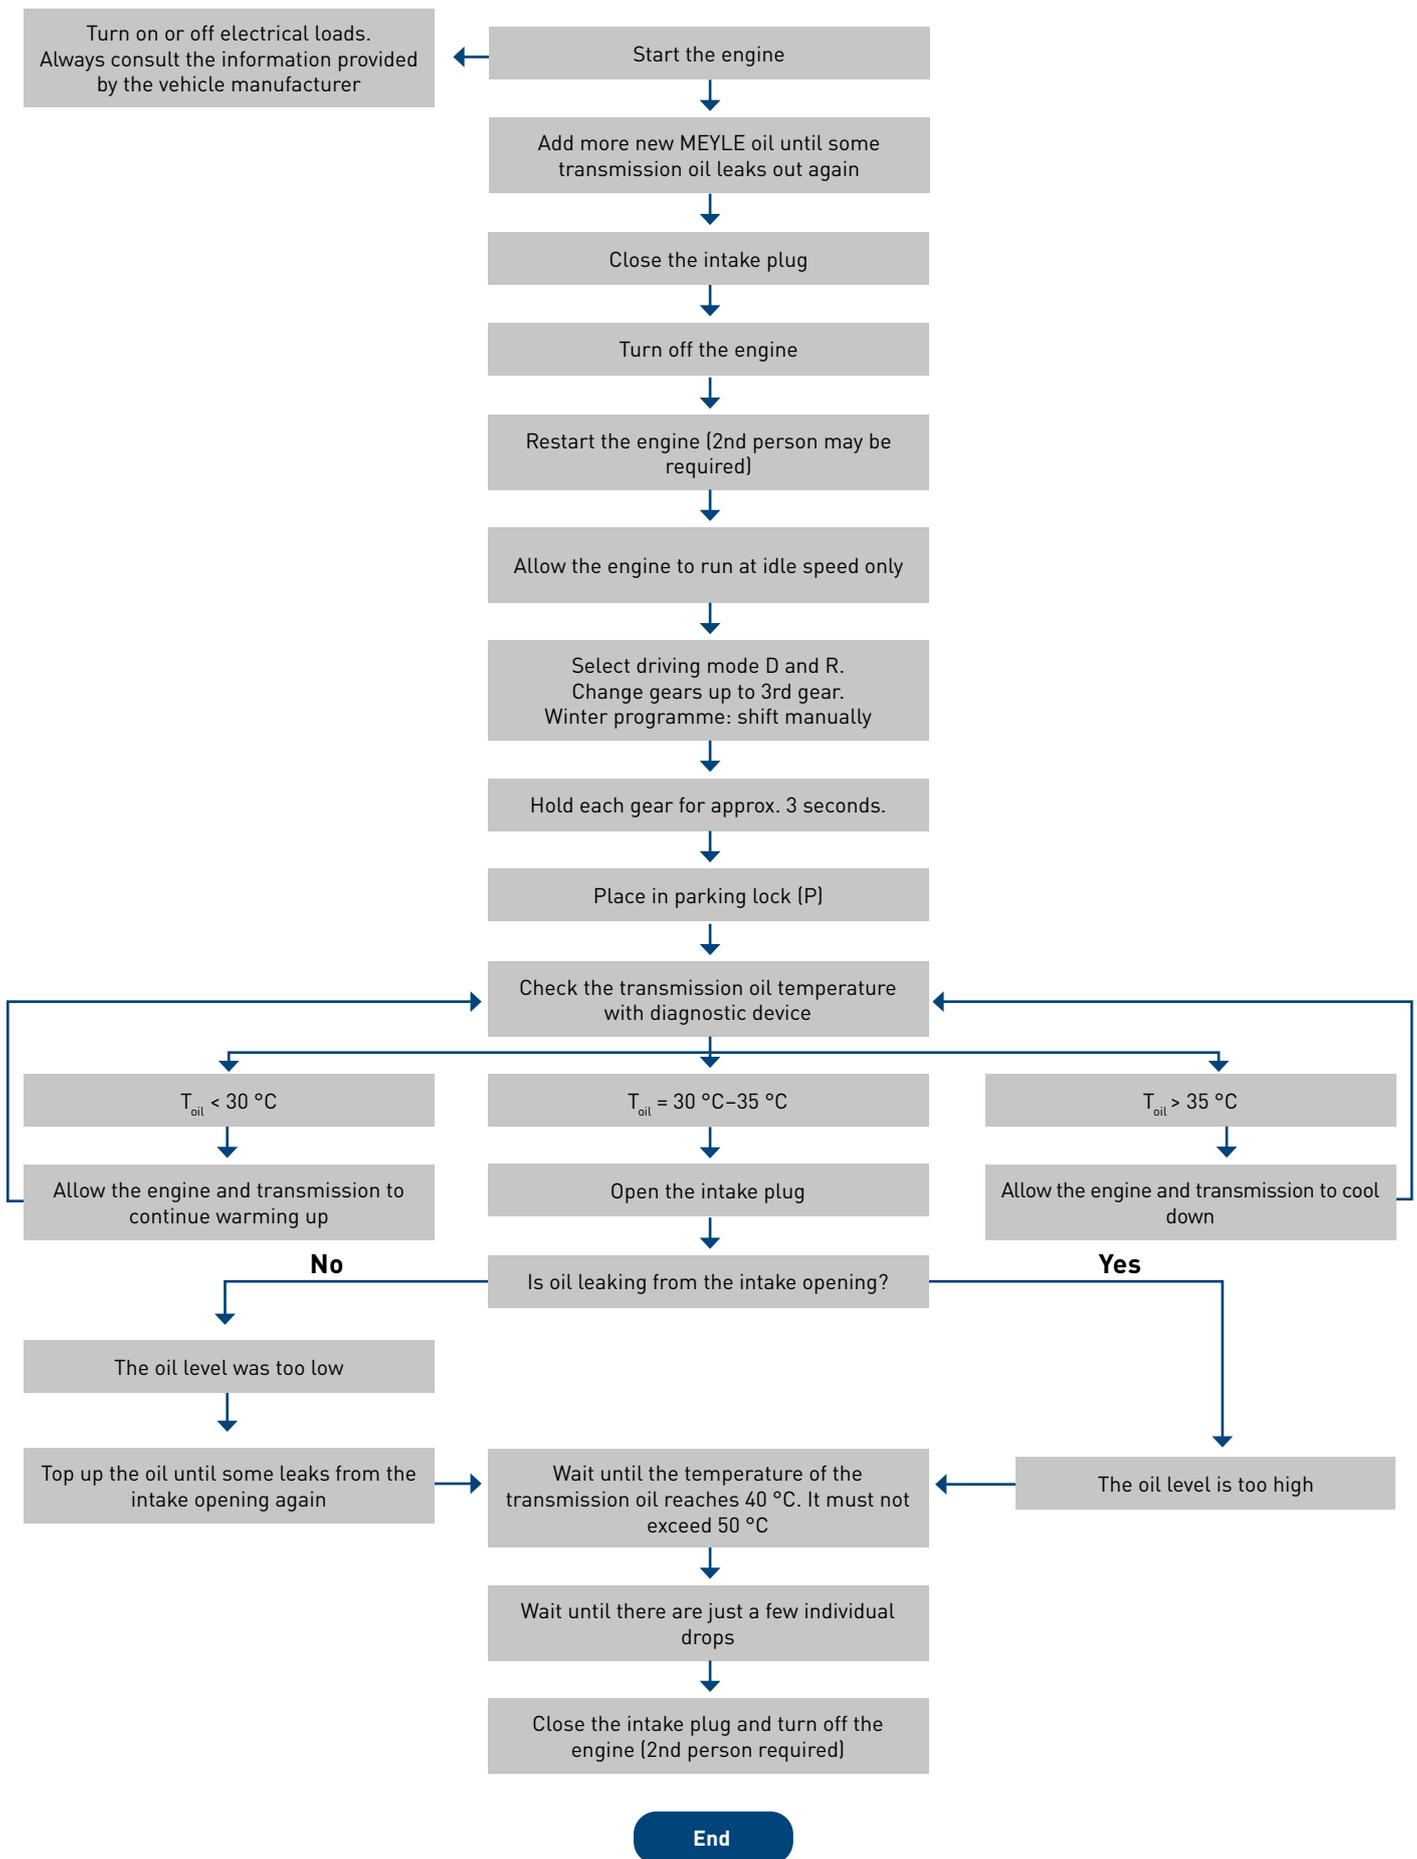

NB: Depending on the type of transmission, it may have a bypass valve which opens or closes the oil circuit to the oil cooler, which is why the drive should be sufficient to ensure the transmission oil temperature reaches at least 75 °C. After the drive, allow the transmission to cool down, check the oil level again and correct if necessary.