



# CLUTCHTECH




## TSB-357

### Gearbox Installation

Due to the size and/or accessibility of the gearbox in this vehicle, it is common for the clutch disc to be damaged during re-installation of the gearbox.

Always use an appropriate transmission/gearbox jack and support the full weight of the gearbox until at least 2 of the bellhousing bolts have been fastened.

Care must be taken to not lever or hang the gearbox on the clutch disc as this can bend the disc and cause difficulties in releasing the clutch during vehicle operation.

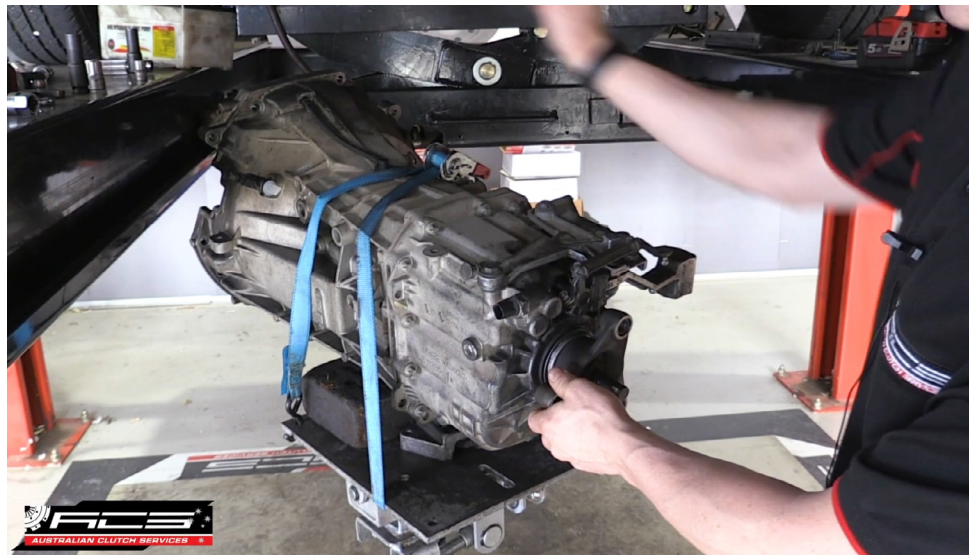

**LEADING BRANDS**

CLUTCHPRO CLUTCHPRO COMMERCIAL



For further support, please contact your distributor and/or visit our website.

AU site: [australianclutch.com.au](http://australianclutch.com.au)  
 US site: [xclutchusa.com](http://xclutchusa.com)

