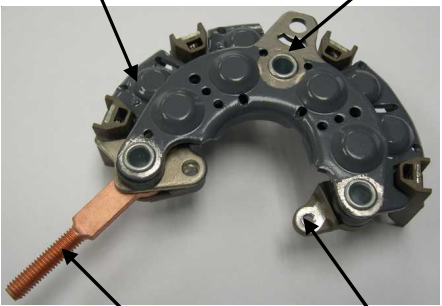
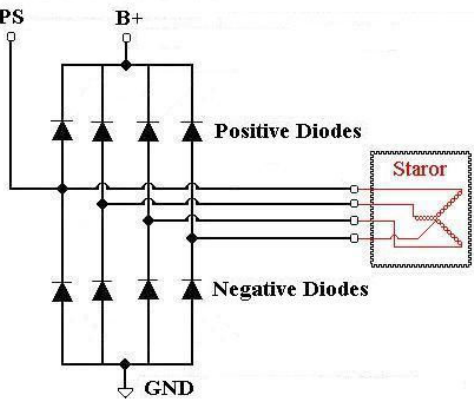


NAME	RN-38 Electrical Specification	NO	RX-1-1-558
------	---------------------------------------	----	-------------------

Picture 	Diagram 
---	--

PARAMETERS AND CONDITIONS		SYMBOLS	MIN.	TYP.	MAX.	UNITS
Storage Temperature Range		Tsto	-40	...	150	°C
Operating Temperature Range		Tope	-30	...	125	°C
Output Diodes	Peak Repetitive Reverse Voltage	Vrm	200	V
	Average Rectified Forward Current	Io	50	A
	Maximum Instantaneous Forward Voltage @ If = 100A , T = 25°C	Vf	1.2	V
	Maximum Reverse Current @ Vrm = 200V	Ir	10	μ A
Diodes Trio	Peak Repetitive Reverse Voltage	Vrm	V
	Average Rectified Forward Current	Io	A
	Maximum Instantaneous Forward Voltage @ If = 3 , T = 25°C	Vf	V
	Maximum Reverse Current at Vrm	Ir	μ A

Component	Rating	Tolerance	Remark	Unit
Condenser	...	±10%	...	μ F
Resistor	...	±5%	...	Ω

Reliability Test	Repetitive Thermal Shock	The Rectifier shall be designed to withstand 500 cycles of -30°C to 125°C in 20minutes and 125°C to -30°C in 20 minutes .
	The High Temp. Test	The Rectifier shall be designed to operate reliability at the rated current of alternator is 80% to 100% and at 6000 rpm (shaft speed) for a minimum of 10 hours at 125°C .
	Load Dump	The Rectifier shall withstand a voltage peak and noise from load dump transients without failure . Test condition : ON/OFF switch per 10 seconds while the rated current of alternator is 80% to 100% at 6000 rpm and test 200 times .
Mechanical Shock	Drop Shock	The Rectifier shall withstand a free fall from one meter onto a cement floor on each of the 3 main axes (x,y,z) two times without failure or performance degradation .
	Vibration Shock	The Rectifier shall withstand a vibration according to the following condition without failure or performance degradation . Condition : amplitude acceleration = 15G , vibration frequency = 10~500Hz , a period of 15 minutes for each of the 3 main axes (x,y,z) , test times = 16 cycle .
	Salt Spray	The Rectifier shall withstand 8 hours immersion in the solution = 5% of salt water at 35°C without failure or performance degradation .

2009.08.10		1	邱建忠					
Date of first edition	Date of revised edition	Edition	Manu-script	Original review	Second review	Approval	Issued mark	Copy's number