

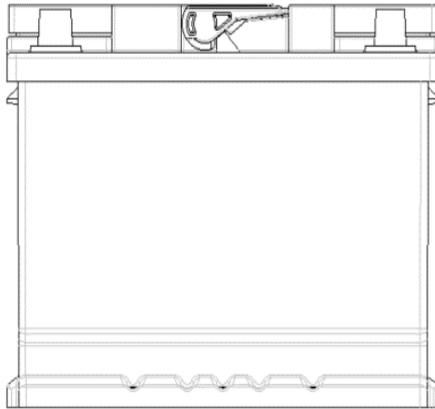
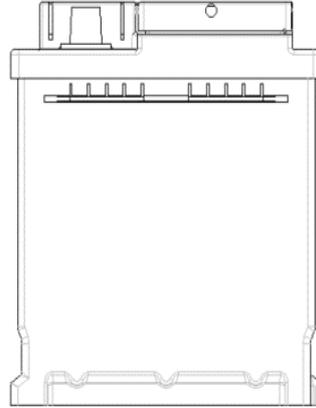


TECHNICAL DATA SHEET

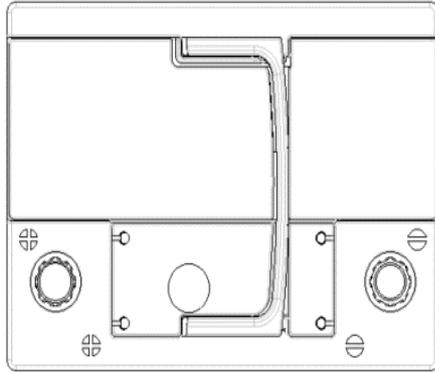

| PERFORMANCE | | | CONTAINER | | |
|---------------------------|---------|----|---------------------------------------------------------------------------------------------------------|----------------------|-------|
| VOLTAGE: | 12 | V | Group: | L2 | Black |
| C20: | 62 | Ah | Hold Down: | B13 | |
| CCA: | 540 | EN | Please refer to the catalog or our website for the details of hold down types of the battery container. | | |
| Vibration: | V3 | | COVER | | |
| Endurance: | - | | Type: | Heat sealed | Black |
| Water consumption: | W4 | | Polarity: | R | |
| Technology: | Flooded | | Terminals: | Standard | |
| Grid alloy: | Ca/Ca | | Filter: | 2 Filters both sides | |
| WEIGHT AND STD. DIMENSION | | | HANDLES | | |
| Battery weight: | 14,3 | kg | Handles: | 1 handle | |
| Volume acid: | 3,6 | l | REMARK | | |
| Length: | 242 | mm | | | |
| Width: | 174 | mm | | | |
| Height: | 190 | mm | | | |
| Total Height: | 190 | mm | | | |