


286, Pangyo-ro, Bundang-gu, Seongnam-si, Gyeonggi-do, 13494 Korea


> Type No.: PMF60005 Created: 05.02.2022 Modified: 05.02.2022

TECHNICAL DATA SHEET

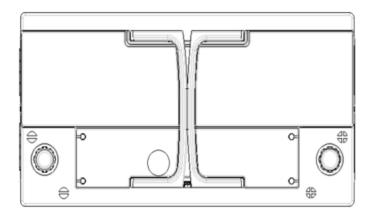



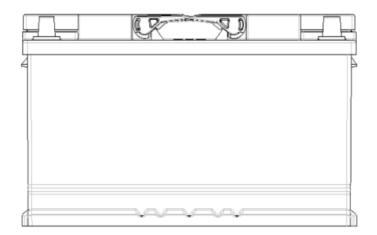



PERFORMANCE			CONTAINER		
VOLTAGE:	12	V	Group:	L5	L.Gray
C20:	100	Ah	Hold Down:	B13	
CCA:	830	EN	Please refer to the catalog or our website for the details of hold down		
Vibration:	V3		types of the battery container.		
Endurance:	E1		COVER		
Water consumption:	W4		Type:	Heat sealed	L.Gray
Technology:	Flooded		Polarity:	L	
Grid alloy:	Ca/Ca		Terminals:	Standard	
			Filter:	2 Filters both sides	
WEIGHT AND STD. DIMENSION			HANDLES		
Battery weight:	22,9	kg	Handles:	2 handles	
Volume acid:	5,9	1		REMARK	
Length:	354	mm			
Width:	174	mm			
Height:	190	mm			
Total Height:	190	mm			

This document includes confidential data, is not contractual and could be changed without notice. Any use, copy or distribution has to be authorised in writing by HANKOOK & COMPANY.