

The ACDelco logo is displayed in white, italicized, sans-serif font with a red underline, set against a dark blue background featuring a blurred image of a Holden racing car.

DEXRON VI PREMIUM FULL SYNTHETIC TRANSMISSION FLUID


TRANSMISSION FLUID



ENGINEERED FOR PERFORMANCE

PRODUCT DESCRIPTION

ACDelco Dexron VI Premium Full Synthetic Transmission Fluid is a high performance, synthetic blend formulation that meets or exceeds the stringent requirements of General Motors Dexron VI specification and provides warranty protection for current Holden vehicles. It also provides improved performance in older vehicles.

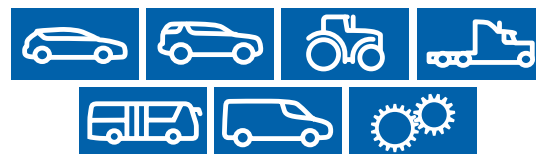

FEATURES & BENEFITS

- "Fill-for-life" oil. e.g. developed for maximum drain intervals
- Improved oxidation and thermal stability
- Optimised frictional properties that provide smooth gear shifting during low temperature operation and help prevent transmission vibration
- Outstanding resistance against sludge and deposit formation
- Improved anti-wear protection which contributes to extended transmission life
- Outstanding low-temperature performance

APPLICATIONS

ACDelco Dexron VI Premium Full Synthetic Transmission Fluid provides warranty protection for current Holden vehicles and improved performance in older models.

It also suits other brand vehicles calling for Dexron VI standards.

Look out for the application symbols across the ACDelco engine oil range. These will help you quickly find the spec you need.



For your nearest ACDelco Automotive Parts Stockist
visit acdelco.co.nz or acdelco.com.au

The ACDelco logo, featuring the brand name in a bold, italicized, sans-serif font with a red underline.

ACDelco

DEXRON VI PREMIUM FULL SYNTHETIC TRANSMISSION FLUID



ENGINEERED FOR PERFORMANCE

PROPERTIES AND SPECIFICATIONS

Meets or exceeds the requirements of:


General Motors Dexron VI

Recommended for use in applications requiring:

- Voith H55.6335.xx (G607)
- JASO 1A-LV (M315) performance standard in Japanese vehicles; this product will deliver the shifting performance, shear stability and exceptional anti-shudder durability which is desired by Japanese and Korean automakers
- Honda ATF-DW-1 and ATF-Z1
- Aisin Warner AW-1
- General Motors DEXRON-II and DEXRON-III 4
- Honda/Acura DW-1 and Z-1
- Hyundai/Kia Genuine ATF and SP-II, SP-III, SP-IV/ SPH-IV and NWS-9638 T-5
- Isuzu SCS, Genuine ATF
- Mazda ATF M-III and ATF M-V
- Mitsubishi ATF-J2, ATF-J3, SP-II, SP-III, SP-IV
- Nissan/Infiniti Matic D, Matic K, Matic J and Matic S
- Subaru ATF, ATF-HP, ATF 5AT
- Toyota/Lexus Type T-III, Type T-IV, Type WS
- Volkswagen/Audi Part #G 055 540 (A2)
- Volvo Part No. 1161521, 1161540/1161640

Properties

- Viscosity
- cSt @ 40°C 29.5
- cSt @ 100°C 5.83
- cP @ -40°C 11,500
- Viscosity Index 145
- Flash Point, °C (°F) 220 (428)
- Gravity, API 35.76
- Color Red

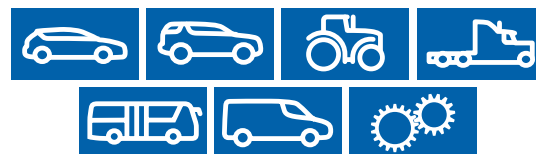

ACDelco P/N	Viscosity	Size (L)
19375058	ATF	20

HEALTH & SAFETY

Material Safety Data Sheets (MSDS) are available for download at www.acdelco.com.au

This product should not be used for purposes other than its intended use.

If disposing of used product, take care to protect the environment.



For your nearest ACDelco Automotive Parts Stockist
visit acdelco.co.nz or acdelco.com.au

ACDelco