

The ACDelco logo is prominently displayed at the top left of the page. It features the brand name in a bold, italicized, sans-serif font. The background of the entire page is a blue-tinted photograph of a truck engine compartment, with various components like hoses, belts, and the engine block visible. The lighting is dramatic, with strong highlights and shadows, giving it a technical and industrial feel. The ACDelco logo is white with a red underline.

# SELECT FLEET LOW SAPS HD DIESEL 15W-40 ENGINE OIL



## ENGINEERED FOR PERFORMANCE

### PRODUCT DESCRIPTION

ACDelco Select Fleet Low SAPS HD Diesel 15W-40 is an extra high-performance diesel engine oil that helps extend engine life in the most severe on and off-highway applications while delivering outstanding performance in modern, high-output, low-emission engines including those with advanced exhaust gas treatment systems.

### FEATURES & BENEFITS

ACDelco Select Fleet Low SAPS HD Diesel 15W-40 is formulated using synthetic technology and a mixed detergent system to deliver cutting-edge performance in both new and older engines.

In addition to assuring excellent control of oil thickening due to soot build-up and outstanding TBN retention for long drain intervals, its advanced technology also provides outstanding resistance to oil consumption, oxidation, corrosive and abrasive wear and high temperature deposits.

- Superior soot-viscosity control
- Maintains engine efficiency, long engine life and long oil life
- Outstanding thermal and oxidative stability
- Excellent oxidation resistance
- Prevents low temperature sludge build-up and high temperature deposits
- Provides excellent oil consumption control
- Assists in reducing oil costs due to less make-up oil during operation
- Excellent TBN reserves assists to improve corrosion protection and to extend drain intervals
- Stay-in-grade shear stability, up to 80% improved high temperature viscosity control
- Maintains viscosity in severe, high temperature service for greater wear protection and long engine life
- Provides excellent low temperature pumpability
- Fast oil flow helps reduce wear during engine start-up in low temperatures
- Superb resistance to corrosive and abrasive wear
- Component compatibility, long gasket, seal, and after treatment (DPF and DOC) life
- Meets demanding specifications of key OEMs and latest API category
- One engine oil for mixed fleet operations

### APPLICATIONS

ACDelco Select Fleet Low SAPS HD Diesel 15W-40 provides outstanding protection in the most demanding diesel engines such as Caterpillar, Cummins, Detroit, Mack, Mercedes Benz, Renault, MAN, Navistar, Volvo and many others.

#### Recommended by ACDelco for use in applications requiring:

Heavy duty diesel engines including euro V/VI modern low emissions vehicles, utilizing technologies such as diesel particulate filter (DPF), selective catalytic reduction (SCR), continuously regenerating traps (CRT), diesel oxidation catalysts (DOC) and exhaust gas recirculation (EGR), high-performance diesel applications including turbo-charged designs featuring EGR technology and diesel applications using older, naturally aspirated conventional designs.



For your nearest ACDelco Automotive Parts Stockist  
call **1800 ACDelco** or visit **acdelco.com.au**


**ACDelco**

# ACDelco

## SELECT FLEET LOW SAPS HD DIESEL 15W-40 ENGINE OIL



### ENGINEERED FOR PERFORMANCE

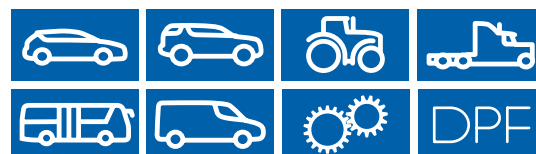

#### APPLICATIONS

- On-highway heavy-duty trucking and off-highway including: construction, mining, quarrying, and agriculture.
  - On-highway applications operating in both high speed/high load and short haul pick-up/delivery.
  - Off-highway applications operating in severe low speed/heavy load conditions
  - High performance gasoline engines and mixed fleet operations.
  - Diesel-powered equipment from American, European and Japanese OEMs
- Look out for the application symbols across the ACDelco engine oil range. These will help you quickly find the spec you need.

#### PROPERTIES AND SPECIFICATIONS

##### Meets or exceeds the requirements of:

- API CK-4, CJ-4, CI-4 Plus, CI-4, CH-4, CG-4, CF-4, CF-2, CF / SN, SM, SL; ACEA E9, E7; JASO DH-2

##### Recommended for use in applications requiring:

- Allison TES-439 X
- Caterpillar ECF-3 X
- Cummins CES 20086/CES 20081 X
- Detroit Fluids Specification 93K218 / 93K222 X
- Deutz DQC II-10 LA X
- Isuzu DEO (w/ DPD Equipped Vehicles) X
- Mack EO-N Premium Plus 03 / Mack EO-O Premium Plus X
- MAN M 3275-1 X / MAN M3575 X
- MB-Approval 228.31 X
- Volvo VDS-4.5 / VDS-4 / VDS-3 / VDS-2 X

##### Properties

- SAE Grade 15W-40
- Viscosity, ASTM D 445
- cSt @ 40°C 109
- cSt @ 100°C 14
- Viscosity Index, ASTM D 2270 130
- Sulfated Ash, wt%, ASTM D 874 0.9
- Total Base #, mg KOH/g, ASTM D 2896 9
- Pour Point, °C, ASTM D 97 -33
- Flash Point, °C, ASTM D 92 225
- Density @ 15°C kg/l, ASTM D 4052 0.875

ACDelco P/N	Size (L)
19375055	20
19375056	208

#### HEALTH & SAFETY

Based on available information, this product is not expected to produce adverse effects on health when used for the intended application and the recommendations provided in the Material Safety Data Sheet (SDS) are followed.

Material Safety Data Sheets (MSDS) are available for download at [www.acdelco.com.au](http://www.acdelco.com.au)

This product should not be used for purposes other than its intended use.

If disposing of used product, take care to protect the environment.



For your nearest ACDelco Automotive Parts Stockist  
call **1800 ACDelco** or visit **[acdelco.com.au](http://acdelco.com.au)**

# ACDelco