

ACDelco

SELECT LS HYPOID GEAR OIL 85W90 GEAR OIL



ENGINEERED FOR PERFORMANCE

PRODUCT DESCRIPTION

ACDelco Select LS Hypoid Gear Oil 85W-90 is an extra high performance, automotive gear lubricant formulated with an advanced additive system specifically for limited-slip differentials.

It is recommended by ACDelco for use in applications requiring API GL-5 performance such as heavy-duty differentials, axles, and final drives where extreme pressures and shock loading are expected.

FEATURES & BENEFITS


Today's truck and automotive equipment applications place higher performance demands on drive train lubricants. Higher speeds, higher torque, heavier loads, and limited-slip capability require improved formulations to maximise differential life and optimise performance. Longer service intervals place additional demands on the gear lubricant. ACDelco Select LS Hypoid Gear Oil 85W-90 is engineered to meet these challenges.

- Excellent frictional properties
- Excellent thermal stability and resistance to high temperature oxidation
- Protection against low speed/high torque wear and against high speed scoring
- Excellent rust, staining, and corrosion protection
- Effective low temperature lubrication
- Superior resistance to foaming
- Compatible with typical automotive seals and gaskets
- Extended gear and bearing life due to minimal deposits and longer seal life
- Increased load carrying capability reducing operating costs
- Maintains film strength for reduced wear
- Minimum leakage and reduced contamination

APPLICATIONS

- Recommended by ACDelco for use in:
- Limited-slip differentials, axles, and final drives requiring API GL-5 level performance
- Passenger cars, on highway light and heavy-duty commercial vehicles
- Off highway industries including construction, quarrying, and agriculture
- Other industrial and automotive applications involving hypoid and other gears operating under conditions where high speed/shock load, high speed/low torque and/or low speed/high torque conditions prevail
- Initial fill, top-up, and refill of enclosed automotive type gearing where SAE 85W-90 limited-slip gear lubricants are recommended
- Not intended for transmissions or transaxles for which engine oil or automatic transmission fluids are recommended

Look out for the application symbols across the ACDelco engine oil range. These will help you quickly find the spec you need.

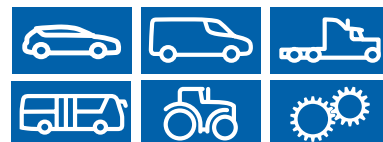

For your nearest ACDelco Automotive Parts Stockist
call **1800 ACDelco** or visit **acdelco.com.au**

ACDelco

ACDelco

SELECT LS HYPOID GEAR OIL 85W90 GEAR OIL



ENGINEERED FOR PERFORMANCE



PROPERTIES AND SPECIFICATIONS

Meets or exceeds the requirements of:

API GL-5

Recommended for use in applications requiring:

ZF TE-ML 05C / 12C / 16E / 21C

Properties

- Grade 85W-90
- Viscosity, ASTM D 445
- cSt 153 @ 40°C
- cSt 15.3 @ 100°C
- Viscosity Index, 100 ASTM D 2270
- Pour Point, -36 °C, ASTM D 97
- Flash Point, 216 °C, ASTM D 92
- Density 0.90 @ 15°C kg/l, ASTM D 4052

ACDelco P/N	Size (L)
19375057	20

HEALTH & SAFETY

Material Safety Data Sheets (MSDS) are available for download at www.acdelco.com.au

This product should not be used for purposes other than its intended use.

If disposing of used product, take care to protect the environment.



For your nearest ACDelco Automotive Parts Stockist
call **1800 ACDelco** or visit **acdelco.com.au**

ACDelco