

## Prescripciones de apriete para culatas


passend für / suitable for  
adaptable à / adaptable a

## Daewoo / Chevrolet



## Das Original

Schraubenkopf / Head shape      Anziehreihenfolge/Tightening sequence/Ordre de serrage/Orden de apriete  
Tête de vis / Cabeza de tornillo

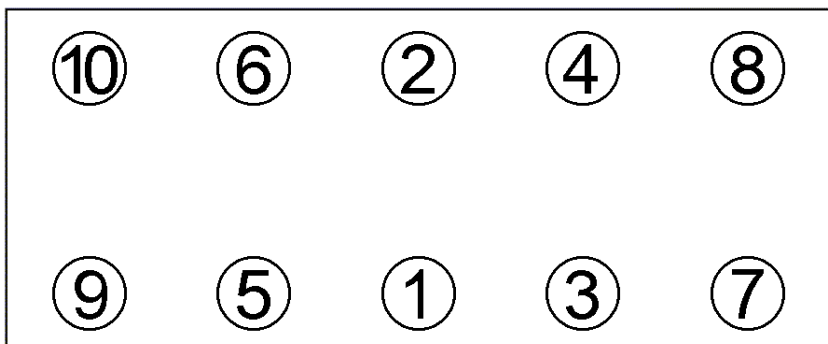

|             |                                                                                   |       |
|-------------|-----------------------------------------------------------------------------------|-------|
| Anziehen/   |  | 25 Nm |
| Tightening/ |  | 70°   |
| Serrage/    |  | 70°   |
| Apriete     |  | 50°   |

## Zeichenerklärung / Explanations / Explication / Explicacion

|                                                                                    |                                             |                              |                                |                                       |
|------------------------------------------------------------------------------------|---------------------------------------------|------------------------------|--------------------------------|---------------------------------------|
|  | neue Zylinderkopfschrauben verwenden        | use new cylinder head bolts  | utiliser des vis neuves        | emplar tornillos nuevos               |
|  | Warmlauf (80°C)                             | warm up time (80°C)          | chauffage (80°C)               | calentamiento (80°C)                  |
|  | Schrauben einzeln lösen und wieder anziehen | loosen and tighten each bolt | deserrer et serrer vis par vis | aflojar y apretar tornillo a tornillo |
|  | Setzzeit                                    | relaxation time              | durée de tassement             | tiempo de espera                      |
|  | Drehwinkel                                  | torque angle                 | angle de serrage               | ángulo de giro                        |

**Motortyp / Engine type / Type de moteur / Tipo de motor**

Chevrolet

MC:F14D3+F16D3 69-80 KW

Lacetti, Nubira, Kalos 1.4 ltr.+1.6 ltr.16V: 03.0

Optra 1.6ltr.: 08.03-

Daewoo

MC: F14D3 + F16D3 69-77 KW

Gentra 1.4 ltr. SR: 05.03 - 04.05

Gentra 1.4 ltr. + 1.6 ltr. E-Tec LS: 05.05-

## Elring-Serviceteam

Fon +49 7123 724 799

Fax +49 7123 724 798

service@elring.de

24/11/12

**\*550.570\***