


V10-0440 X-REF 02E 305 051 C KIT

HYDRAULIC FILTER, AUTOMATIC TRANSMISSION

22101


Part No.: 10101-119740E Test Date : 2010/3/15

Filtration Efficiency(end of life)										
Test Conditions										
Test Fluid: 3S SPECIALTY DEXRON-III						Test Temperature:Ambient				
Filter Element M	edia :	meta	l medi	ia (201	HZ)					
Test Contaminan	t Typ	e.: IS	O 121	03-1,	A4 C	OARS	SE			
Flow Rate: 100 L	/HR									
]	Differ	ential	Press	ure ve	rsus (Contar	ninant	added		
Contaminant Mass(g) Pressure(psi)	0	5	10	15	20	25	30			
OE-inlet Pressure(psi)	87	86	86	87	85	85	84			
OE-outlet Pressure(psi)	70	70	68	68	67	66	65			
OE-Pressure Drop (psi)	17	16	18	19	18	19	19			
LS-inlet Pressure(psi)	88	87	86	85	85	83	84			
LS-outlet Pressure(psi)	72	71	68	66	66	63	63			
LS-Pressure Drop (psi)	16	16	18	19	19	20	21			1

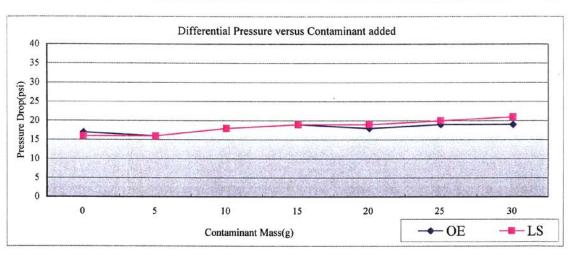

Notes: Temporary offers are only valid while stocks last. All offers remain subject to prior sale. Our general terms and conditions of sale and delivery as well as our warranty conditions apply, which are available for download on our website. All prices are net prices. Errors excepted. Reference numbers and names, with the exception of VIEROL AG, are for comparison only and may not be disclosed in invoices. They are non-binding and no indication of origin. © VIEROL AG



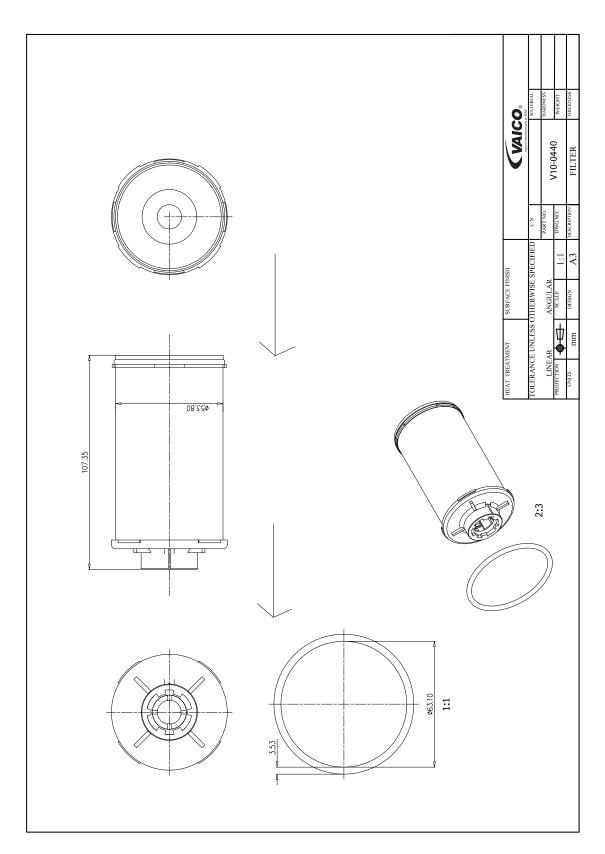

Notes: Temporary offers are only valid while stocks last. All offers remain subject to prior sale. Our general terms and conditions of sale and delivery as well as our warranty conditions apply, which are available for download on our website. All prices are net prices. Errors excepted. Reference numbers and names, with the exception of VIEROL AG, are for comparison only and may not be disclosed in invoices. They are non-binding and no indication of origin. © VIEROL AG